




RSS072



LINERLESS LABELLER SAVE FRESHNESS AND EASY OPENING LABEL



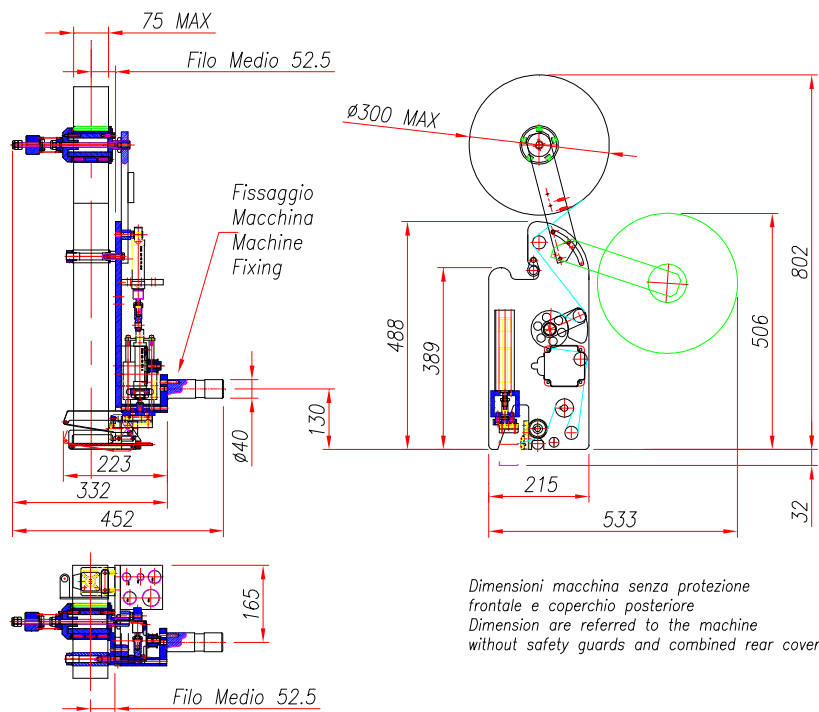

DISTRIBUTOR LINERLESS LABELS

BENEFITS:

Considerable economy on materials more autonomy of work thanks to reels without support siliconised ecological, not to produce waste, such as support siliconised reserve of adhesive for labels "open and close" wide range of adhesives for application on different media.

PRODUCTIVITY:

The capacity of the spool (quantity labels) is greater than 144% compared equivalent coil of adhesive labels (1.030 M compared to 421 M); reduction in the machine stop equal to 69% compared with a reel of adhesive labels.

EASY OF USE:

The absence of the retractor for support siliconised allows a change coil more simple; greater speed operation. The passage of the material from print to the group coil is short and very simple. A reel of material linerless from 1,030 M weighs about 40% less than a coil equivalent of adhesive labels traditional; less effort for the operator.

FEATURES:

Progress of support sticker and guaranteed by a group towing motorized and a special group cut (patented) guarantees the dell'funzionamento to dry in the absence of lubricants. l'applicazione label is by means of a buffer operated by a mechanical cylinder.

TECHNICAL FEATURES:

Physical adhesive: plastic film thickness 50 60 µm
Adhesive hot melt or acrylic from 15 to 20 g/m²

Band width adhesive: min 40 mm – max 75 mm

Cycle for the application: up to 90 Labels/min with label of length 30 mm applicator 50mm stroke.

Product speed: up to 50 m/min

Power supply: 230 V – 50/60 Hz 600 W

Protection degree: IP54

Air Supply: 6 bar (dry and cleaned air) 100 nl/min

Weight: 90 kg

Dimension: 700x250x412 mm



ALS srl - Via Pesa, 6 - San Casciano Val di Pesa (FI) - ITALY
Tel. +39. 055.820755 - Fax +39. 055.8229985 - Skype: als.pharma.cosmetics.systems
Internet: www.alsystems.it - e-mail: info@alsystems.it